


Specifications

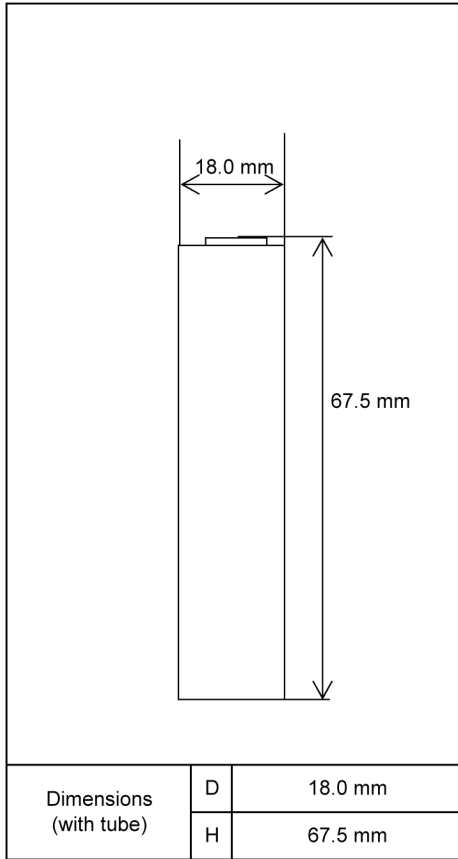

Type : Nickel-Metal Hydride Battery		Size : 4/3FA
Capacity ¹⁾	Typical	4500mAh
	Minimum	4100mAh
Nominal Voltage		1.2V
Charging Current x Time	Fast Charge ²⁾	3000mA x about 1.6h
Ambient Temp.	Charge Condition	Fast Charge ²⁾ 0°C - 40°C
	Discharge Condition 0°C - 50°C	
	Storage Condition	Less than 30days
Less than 90days		-20°C - 40°C
Less than 1year		-20°C - 30°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)		Approx. 20mΩ(at 1000Hz)
Weight ⁴⁾		Approx. 62 g
Size ⁴⁾ : (Diameter) x (Height)		18.0(D) x 67.5(H) mm

1)Single cell capacity under the following condition.

Charge : 450mA×16h, Discharge : 900mA(E.V.=1.0V) at 20°C


2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

4)With tube.

Typical Characteristics

Charge

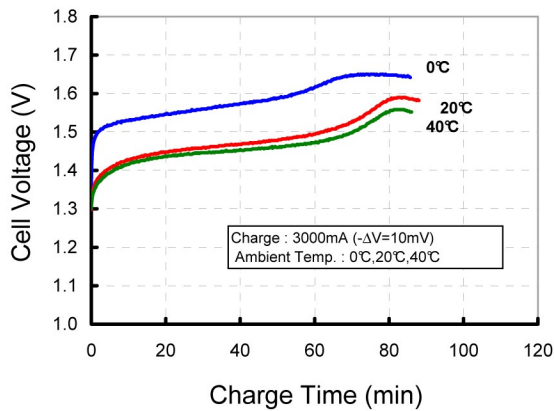

Discharge

