


New
BK110AAH
AA size (HR 15/51)

High temperature & long life type

H type

■ Dimensions (with tube)

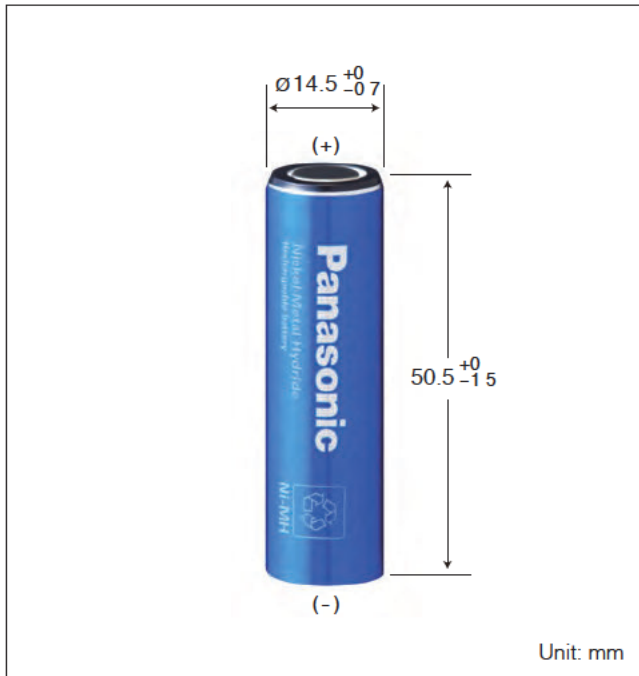

■ Specifications

Diameter	14.5 +0 / -0.7 mm
Height	50.5 +0 / -1.5 mm
Approximate Weight	24 g



Nominal Voltage		1.2 V	
Discharge Capacity ^{*1}	Average ^{*2}	1180 mAh	
	Rated (min.)	1100 mAh	
Approx. Internal impedance at 1000Hz at charged state.		17 mΩ	
Charge	Standard	110 mA X 16 hrs.	
	Rapid ^{*3}	550 mA X 2.4 hrs.	
	Low rate	55 mA X 32 hrs. 37 mA X 48 hrs.	
Ambient Temperature	Charge	Standard	-10 °C to 60 °C
		Low rate	-10 °C to 60 °C
		Rapid	-10 °C to 45 °C
Discharge		-10 °C to 60 °C	
Storage	<1 year	-20 °C to 35 °C	
	<6 months	-20 °C to 45 °C	
	<1 month	-20 °C to 55 °C	
	<1 week	-20 °C to 65 °C	

*1 After charging at 0.1 I_t for 16 hours discharging at 0.2 I_t
 *2 For reference only
 *3 Need specially designed control system Please contact Panasonic for details

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

* The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

■ Typical charge characteristics

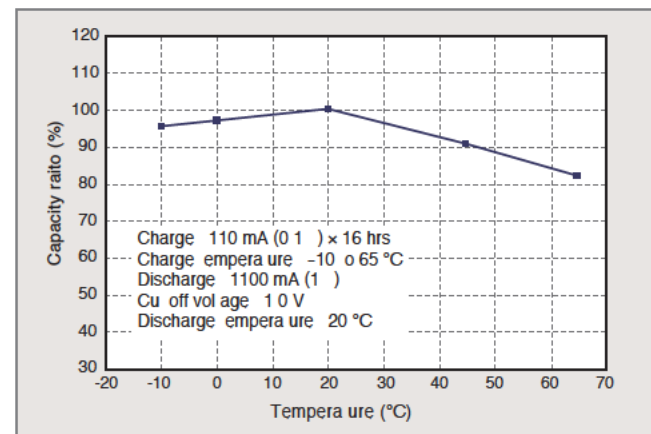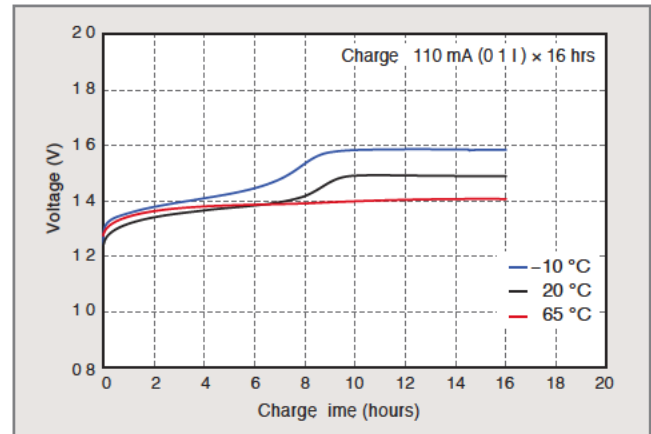

■ Typical discharge characteristics

